

# Cork<sup>XP</sup> Designer

## TORLYS smart floors

BOULEVARD JASPER



## Walk on air



Seamless Installation



Easily Repairable



Gap Resistant



Antimicrobial



Waterproof



Dent Resistant



Wear Resistant



Warm&Quiet



Plastic Free



# Cork<sup>XP</sup> Designer

**7/16" x 7-1/2" x 68-3/4"**  
**10.5 mm x 194 mm x 1746 mm**

**21.85 SF per box**  
**45 boxes per pallet**

## Smarter Design

- Stunning visuals in both traditional and contemporary cork patterns
- Waterproof surface for installation anywhere in the home
- Transition-Free up to 50'x50' – float, nail or glue
- Industry leading glueless locking system by Uniclic<sup>®</sup> with pretension – keeping any water on the surface of the floor
- 4-sided bevel edge

## Better Performance

- TORLYS Maxx Commercial Finish offers extreme stain and wear resistance with an antimicrobial surface
- Smart engineering guarantees extreme durability, ensuring Cork<sup>XP</sup> will never need refinishing
- CorkPlus<sup>™</sup> Blue attached underlay with Microban<sup>®</sup> antimicrobial product protection
- Suitable for use over radiant heat
- FloorScore Equivalent

## More Sustainable


- Plastic Free - 100% natural product
- FSC<sup>®</sup> Certified
- Made without cutting down any cork oak trees, ensuring forests remain undamaged
- TORLYS Bulldog<sup>™</sup> enables single planks of Cork<sup>XP</sup> to be replaced, quickly and easily. No mess, no dust, no downtime

Visit [torlys.com](http://torlys.com) for more information




LEED<sup>®</sup>


TORLYS  
**Bulldog**<sup>™</sup>  
EASY PLANK REPLACER



Paseo Fulwell | CCUXP-DS773-FSMX



Paseo Merida | CCUXP-DS774-FSMX



Paseo Aspen | CCUXP-DS775-FSMX



Burl Natural | CCUXP-DS100-FSMX



Boulevard Natural | CCUXP-DS400-FSMX



Boulevard Jasper | CCUXP-DS402-FSMX

# A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.



TORLYS Maxx Commercial Finish with built-in antimicrobial technology will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit [torlys.com/CleanerFloors](https://torlys.com/CleanerFloors)



## Finishing Touches

### TORLYS Smart-T Plus Molding

Easy and convenient, the TORLYS Smart-T Plus molding solution offers an adaptable and digitally matched profile. Suitable for floating applications.\*

### TORLYS SmartNosing Molding

A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

\*See installation instructions for details.

## Sustainability

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, TORLYS will offer a 10% credit towards the purchase of a new floor when your existing TORLYS Smart Floor is reused in another room or donated to Habitat for Humanity.

## Warranty

**Lifetime Residential S.M.A.R.T. Warranty**

**15-Year Commercial Warranty**

A combination of heat and sunlight can cause natural flooring to fade or change colour. Visit [torlys.com/warranty](https://torlys.com/warranty) for details.

## TORLYS Beautiful Promise

Love the style and colour of your floors or change them – no questions asked. That’s our beautiful promise.\*

## Easy Maintenance

Cork<sup>XP</sup> ensures easy ongoing maintenance, including wet mopping.\*


\*Visit [torlys.com](http://torlys.com) for details.

## ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648	Critical Radiant Flux	Average Critical Radiant Flux: 0.27 W/cm2	(NFPA 101 Classification: Class 2)
ASTM E662	Optical Density of Smoke	Pass ≤450	
ASTM E84	Surface Burning	Flame Spread Index: 50 Smoked-Developed Index: 135	(ASTM E84 Class B)
AATCC 30-III (TM 30-III Aspergillus Niger)	Antifungal Assessment and Mildew Resistance Test	Pass = Not supportive of fungal growth	
ANSI A137.1-2012 (aka DCOF AcuTest)***	Coefficient of Friction (Floor Slip Resistance)	Average DCOF (wet): 0.47	
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI Static Load Limit / Residual Indentation @ 1000 PSI	0.007 inch 0.023 inch	
ASTM D2394	Falling Ball Indentation Test @ 72 Inches Drop	0.009 inch = no Fracture of surface or interior material	
ASTM F1914	Short Term Indentation and Residual Indentation	Residual Indentation @ 75 lbs: 0.013 inch	
EN 14354:2017	Determination of the Wear Resistance Using the Falling Sand Method	> 6,000 revolutions	
ASTM C518	Thermal Resistance - Imperial Units Thermal Resistance - SI Units	0.563 °F·ft² h/BTU 0.0992 (m² K)/W	
ASTM F925	Resistance to Chemicals	0 = No Change*	*(11 of 12 chemicals)
ASTM F1515	Resistance to Light	Gray Scale Rating: 1	(Test result after 300 hours exposure)
ASTM E492-09 (2016)e1 / ASTM E989 - 18	Impact Insulation Class	Contact TORLYS for more information	
ASTM E90-09 (2016) / ASTM E413 - 10	Sound Transmission Coefficient	Contact TORLYS for more information	
ASTM E2179	Delta IIC	Contact TORLYS for more information	

\*\*\*Note: Replaces ASTM C1028-07, withdrawn by ASTM in 2014

## Smarter Design

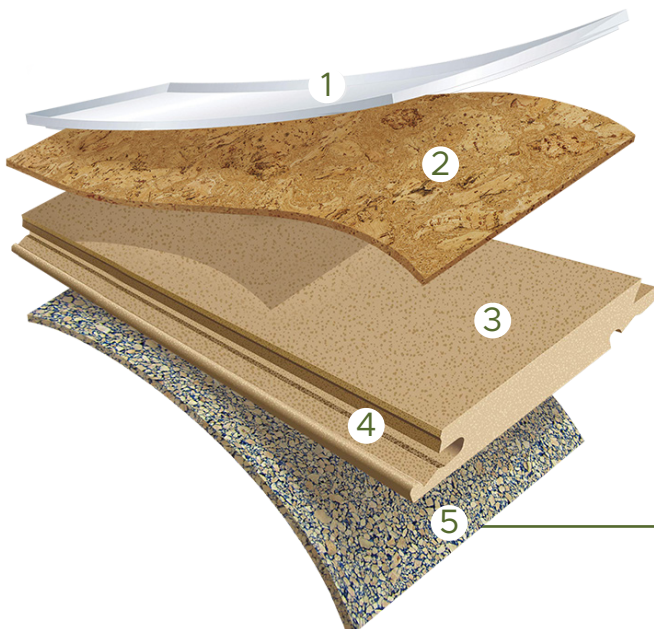

1. TORLYS Maxx Commercial Finish (Antimicrobial | Anti-Wear)
2. Extreme high density cork layer with waterproof technology
3. Low swell TORLYS™ Enhanced Smart Core with extreme dent resistance and dimensional stability
4. Uniclic® joint. The most advanced, gap-resistant joint system available today
5. TORLYS CorkPlus™ Blue underlayment with Microban® antimicrobial product protection

MADE IN PORTUGAL

