

CorkWood^{XP} Designer

TORLYS
smart floors

FAIRWINDS OAK



Walk on air



Seamless Installation



Easily Repairable



Gap Resistant



Antimicrobial



Water Proof



Dent Resistant



Wear Resistant



Warm&Quiet



Plastic Free



CorkWood^{XP} Designer

**7/16" x 7-1/2" x 68-3/4" (Nominal)
10.5 mm x 194 mm x 1746 mm**

**21.85 SF per box
45 boxes per pallet**

Smarter Design

- Cutting edge printing technology creates the beauty of hardwood in warm and comfortable cork
- Waterproof surface for installation anywhere in the home
- Transition-Free up to 50'x50' – float, nail or glue
- Industry leading glueless locking system by Uniclic® with pretension – keeping any water on the surface of the floor
- 4-sided bevel edge

Better Performance

- TORLYS Maxx Commercial Finish offers extreme stain and wear resistance with an antimicrobial surface
- Smart engineering guarantees extreme durability, ensuring CorkWood^{XP} will never need refinishing
- CorkPlus™ Blue attached underlay with Microban® antimicrobial product protection
- Suitable for use over radiant heat
- FloorScore Equivalent

More Sustainable

- Plastic Free - 100% natural product
- FSC® Certified
- Made without cutting down any cork oak trees, ensuring forests remain undamaged
- TORLYS Bulldog™ enables single planks of CorkWood^{XP} to be replaced, quickly and easily. No mess, no dust, no downtime

Visit torlys.com for more information



LEED®

TORLYS
Bulldog™
EASY PLANK REPLACER

*High Shade Variation



Palmetto Oak | CWXPD-3721-FSMX



Cumulus Oak | CWXPD-3720-FSMX



Fairwinds Oak* | CWXPD-3722-FSMX



River Run Oak | CWXPD-3723-FSMX



Rockport Oak | CWXPD-3724-FSMX



Eaglecrest Oak | CWXPD-3727-FSMX



Falcon Oak | CWXPD-3729-FSMX



Creekbed Oak | CWXPD-3725-FSMX



Otter Oak* | CWXPD-3726-FSMX



Adirondack Oak | CWXPD-3728-FSMX

A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.



TORLYS Maxx Commercial Finish with built-in antimicrobial technology will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit torlys.com/CleanerFloors



Finishing Touches

TORLYS Smart-T Plus Molding

Easy and convenient, the TORLYS Smart-T Plus molding solution offers an adaptable and digitally matched profile. Suitable for floating applications.*

TORLYS SmartNosing Molding

A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

*See installation instructions for details.

Sustainability

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, TORLYS will offer a 10% credit towards the purchase of a new floor when your existing TORLYS Smart Floor is reused in another room or donated to Habitat for Humanity.

Warranty

Lifetime Residential S.M.A.R.T. Warranty

15-Year Commercial Warranty

Visit torlys.com/warranty for details.

TORLYS Beautiful Promise

Love the style and colour of your floors or change them – no questions asked. That’s our beautiful promise.*

Easy Maintenance


CorkWood^{XP} ensures easy ongoing maintenance, including wet mopping*

*Visit torlys.com for details.

ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648	Critical Radiant Flux	Average Critical Radiant Flux: 0.27 W/cm2	(NFPA 101 Classification: Class 2)
ASTM E662	Optical Density of Smoke	Pass ≤450	
ASTM E84	Surface Burning	Flame Spread Index: 50 Smoked-Developed Index: 135	(ASTM E84 Class B)
AATCC 30-III (TM 30-III Aspergillus Niger)	Antifungal Assessment and Mildew Resistance Test	Pass = Not supportive of fungal growth	
ANSI A137.1-2012 (aka DCOF AcuTest)***	Coefficient of Friction (Floor Slip Resistance)	Average DCOF (wet): 0.46	
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI Static Load Limit / Residual Indentation @ 1000 PSI	0.007 inch 0.025 inch	
ASTM D2394	Falling Ball Indentation Test @ 72 Inches Drop	0.008 inch = no Fracture of surface or interior material	
ASTM F1914	Short Term Indentation and Residual Indentation	Residual Indentation @ 75 lbs: 0.014 inch	
EN 14354:2017	Determination of the Wear Resistance Using the Falling Sand Method	> 6,000 revolutions	
ASTM C518	Thermal Resistance - Imperial Units Thermal Resistance - SI Units	0.563 °F.ft² h/BTU 0.0992 (m² K)/W	
ASTM F925	Resistance to Chemicals	0 = No Change*	*(11 of 12 chemicals)
ASTM F1515	Resistance to Light	ΔE≤8 / Gray Scale Rating: 4	(Test result after 300 hours exposure)
ASTM E492-09 (2016)e1 / ASTM E989 - 18	Impact Insulation Class	Contact TORLYS for more information	
ASTM E90-09 (2016) / ASTM E413 - 10	Sound Transmission Coefficient	Contact TORLYS for more information	
ASTM E2179	Delta IIC	Contact TORLYS for more information	

***Note: Replaces ASTM C1028-07, withdrawn by ASTM in 2014

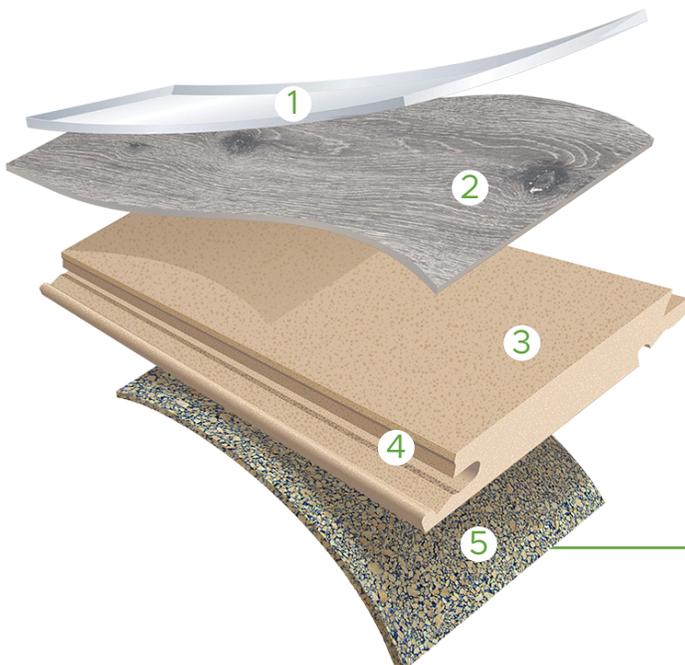

Smarter Design

1. TORLYS Maxx Commercial Finish (Antimicrobial | Anti-Wear)
2. Extreme high density digitally printed cork layer with waterproof technology
3. Low swell TORLYS™ Enhanced Smart Core with extreme dent resistance and dimensional stability
4. Uniclic® joint. The most advanced, gap-resistant joint system available today
5. TORLYS CorkPlus™ Blue underlayment with Microban® antimicrobial product protection

MADE IN PORTUGAL

