

PROFESSIONAL

# Colossia



3/8" (T) X 9-7/16" (W) X 80-1/2" (L) (Nominal)  
10 mm (T) X 240 mm (W) X 2050 mm (L)

26.48 SF per box

## DETAILS

- Longer and wider planks.
- Light wire brushed oak.
- Matte finish.
- 10mm waterproof laminate with HydroSeal.
- GenuEdge™ bevel enables the surface design and color to "roll over" the edge for the most realistic looks.
- Easy clean surface that can be wet and steam mopped.
- 4-sided bevel edge and stunning wood visuals and realistic EIR textures.
- AC4 wear rating plus a protective wear layer to stand up against everyday scratches, stains and fading.
- Install Colossia up to 50'x 50' with no transitions or "speed bumps"!

GenuEdge™  
TECHNOLOGY




TRANSITION-FREE  
INSTALLATION SYSTEM

# Laminate



BARRINGTON OAK

NatureTEK™  
PERFORMANCE WOOD PLUS

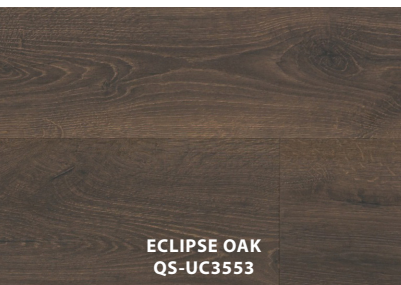

ECLIPSE OAK  
QS-UC3553



WALKER OAK  
QS-UC3923



GARNER OAK  
QS-UC3924



PELZER OAK  
QS-UC3925



DENALI OAK  
QS-UC3926



ROSEBURG OAK  
QS-UC3927



BARRINGTON OAK  
QS-UC3928



PROVIDENCE OAK  
QS-UC4043



## ACCESSORIES



### TORLYS Exclusive | smartSTEP Moulding

TORLYS laminates offer a unique smartSTEP moulding solution to add the perfect finishing touch to your installation. The smartSTEP is made from a full plank of flooring for a perfect colour, texture & dimension match. It also uses the same Uniclic® joint as the matching floor for an easy installation. A specially engineered metal plate can be used in conjunction with the smartSTEP to allow for a floating installation on landings.



### Incizo 5-in-1 Moulding

A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding



Square Nose to Carpet



Reducer



Square Nose Edge Moulding



Flush Stair Nosing\*

\*An aluminum sub-base is required for the Flush Stair Nosing installations. Incizo can also be used for non-flush.

## SOUND RATINGS | IIC: 74

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.



### WATERPROOF FLOORING


Colossia is waterproof\* thanks to a combination of the Uniclic® joint and HydroSeal coating.



### HYDROSEAL

HydroSeal water-repellent edge coating keeps water from penetrating the floor's core.

\*Fully waterproof when installed with a perimeter seal. Visit [torlys.com](http://torlys.com) details.

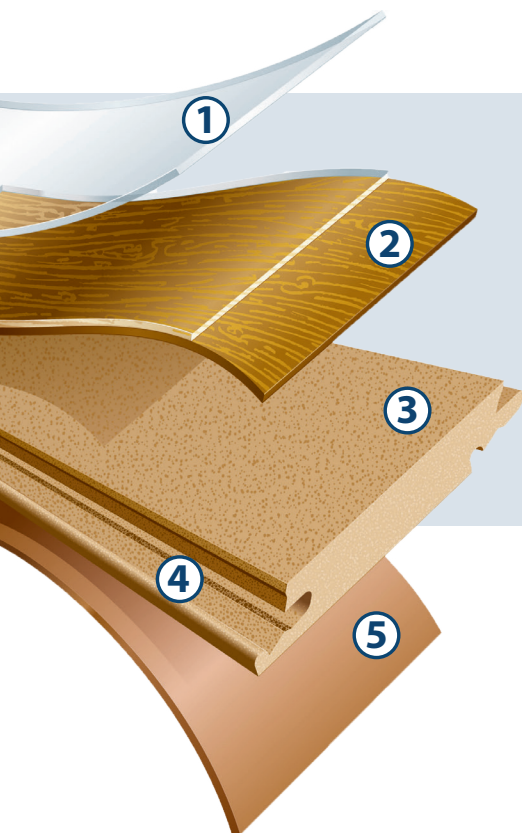

## QUALITY BUILT IN

- 1. Top Layer** A top finishing layer to ensure your floor stays beautiful year after year.
- 2. Decorative Layer** Real wood-like patterns featuring natural designs.
- 3. TORLYS Smart Core** Dent resistant and strong.
- 4. TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today, finished with HydroSeal.
- 5. Bottom Layer** Provides moisture protection to the core and added stability.



**35-Year Residential Limited Warranty** for Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty. Colossia can be disassembled and re-used in another room or home.

**10-Year Surface Waterproof Warranty;** no time limit for standing water; damp-mopping allowed.

**7-Year Limited Commercial** Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty.

\*Specific installation instructions apply.

