

PROFESSIONAL

Leuco



1/2" (T) x 7-1/2" (W) x 54-11/32" (L) (nominal)
12 mm (T) x 190 mm (W) x 1380 mm (L)

19.76 SF per box

DETAILS

- 10mm waterproof laminate with 2mm attached pad (total thickness: 12mm).
- Attached pad guards against mold and mildew growth.
- Milled bevel with HydroSeal.
- Easy clean surface that is damp mop approved.
- 4-sided bevel edge with stunning wood visuals and realistic EIR textures.
- AC4 wear rating with a protective wear layer to stand up against everyday scratches, stains and fading.
- CARB 2 compliant.
- Install transition free, up to 50'x50'.
- Replace single planks of Leuco quickly and easily with TORLYS Bulldog™. No mess, no dust, no downtime.
- Made in USA.

TRANSITION FREE
INSTALLATION SYSTEM




TORLYS
smart floors

NatureTEK SELECT


Laminate




WILLOW OAK

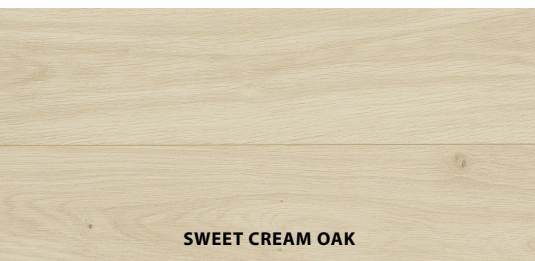

SWEET CREAM OAK

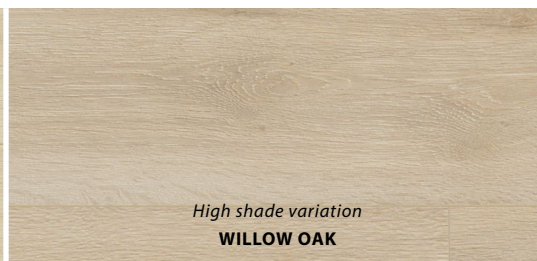


High shade variation
WILLOW OAK

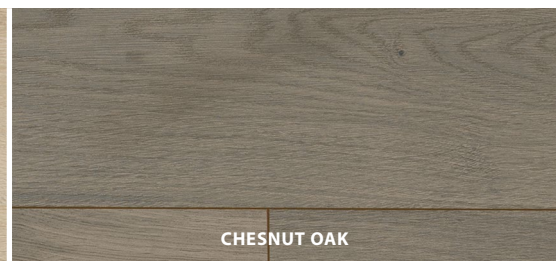

CHESNUT OAK



NATURAL OAK

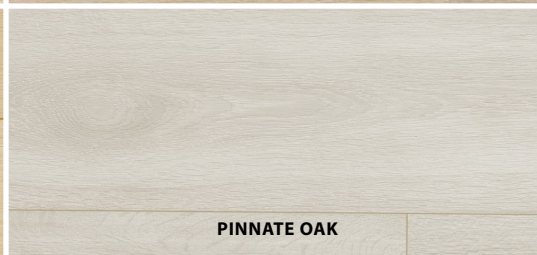

PINNATE OAK



ALBA OAK

ACCESSORIES



Incizo 5-in-1 Moulding A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding
used to adjoin
two floors of
identical height.



Reducer
used to transition two
different floor heights.



**Square Nose
to Carpet**
used to
transition to
carpet.



**Square Nose Edge
Moulding**
used to conceal the
expansion gap around
the room's perimeter.

Flush Stair Nosing*

seamless trim moulding for installation of laminate on staircases. Clicks flush into your laminate floor, thus eliminating the overlap of traditional stair nosing. An aluminum sub-base is required for the Flush Stair Nosing installations. It can also be used for non-flush installations on landings

*An aluminum sub-base is required for the Flush Stair Nosing installations. Incizo can also be used for non-flush.



WATERPROOF FLOORING


Leuco is waterproof* thanks to a combination of the Uniclic® joint and Hydroseal coating.



HYDROSEAL

HydroSeal water-repellent edge coating keeps water from penetrating the floor's core.

*Fully waterproof when installed with a perimeter seal. Visit torlys.com details.

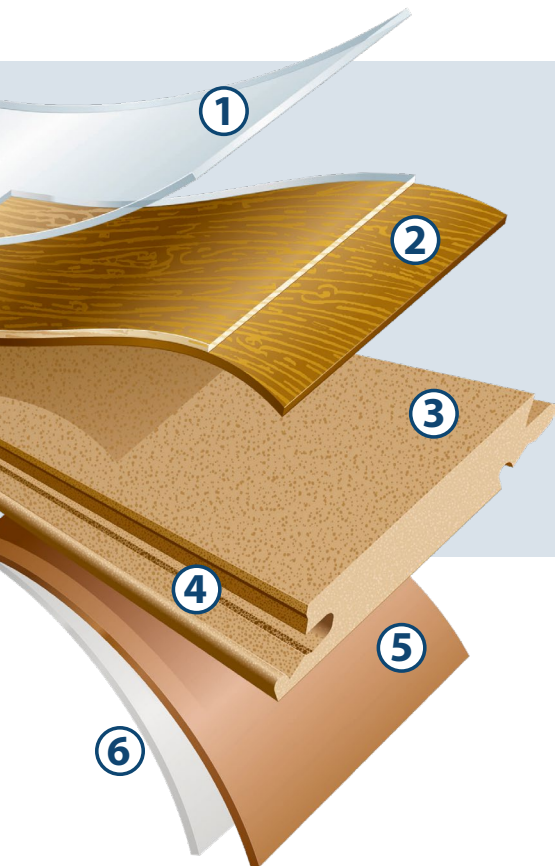

QUALITY BUILT IN

- 1. Top Layer** A top finishing layer to ensure your floor stays beautiful year after year, complete with HydroSeal.
- 2. Decorative Layer** Real wood-like textures featuring natural designs.
- 3. TORLYS Smart Core** Dent resistant and strong.
- 4. TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today.
- 5. Bottom Layer** Backing provides a moisture barrier and added stability.
- 6. Attached 2mm Pad** For sound reduction, and mold / mildew protection.



35-Year Residential Limited Warranty for Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty. Leuco can be disassembled and re-used in another room or home.

10-Year Surface Waterproof Warranty; no time limit for standing water; damp-mopping allowed.

7-Year Limited Commercial Wear, Stain, Fade, Structural and Joint Integrity/No Gapping Warranty.

*Specific installation instructions apply.

