

PROFESSIONAL

Reclaimé



1/2" (T) X 7-1/2" (W) X 54-11/32" (L) (Nominal)
12mm (T) X 190mm (W) X 1380mm (L)

16.93 SF per box

DETAILS

- Distinctive look of vintage reclaimed oak wood.
- Planks with "skip-sawn" texturing, offering a rustic, hand-hewn appeal.
- Expansive width and length.
- Milled bevel with HydroSeal.
- 12mm waterproof laminate.
- Easy clean surface that is damp mop approved.
- 4-sided bevel edge with stunning wood visuals and realistic EIR textures.
- AC4 wear rating plus a protective wear layer to stand up against everyday scratches, stains and fading.
- Install Reclaimé up to 50'x 50' with no transitions or "speed bumps"!

TRANSITION FREE
INSTALLATION SYSTEM



Laminate



ANDERSON OAK

NatureTEK^{SELECT}

** AC3 rated wear layer † High Shade Variation



MALTED TAWNY OAK**
QS-UF1548W



HEATHERED OAK †
QS-UF1574W



FLINT OAK†
QS-UF1575W



MOCHA OAK**
QS-UF1578W



WHITE WASH OAK†
QS-UF1667W



OLD TOWN OAK†
QS-UF1935W



TUDOR OAK†
QS-UF3132W




JEFFERSON OAK
QS-UF4202W



CHESTER OAK
QS-UF4203W




HAMILTON OAK
QS-UF4204W



ANDERSON OAK
QS-UF4205W



WILSON OAK
QS-UF4206W



ROANE OAK
QS-UF4207W

ACCESSORIES



TORLYS Exclusive | smartSTEP Moulding

TORLYS laminates offer a unique smartSTEP moulding solution to add the perfect finishing touch to your installation. The smartSTEP is made from a full plank of flooring for a perfect colour, texture & dimension match. It also uses the same Uniclic® joint as the matching floor for an easy installation. A specially engineered metal plate can be used in conjunction with the smartSTEP to allow for a floating installation on landings.



Incizo 5-in-1 Moulding

A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding



Square Nose to Carpet



Reducer



Square Nose Edge Moulding



Flush Stair Nosing*

*An aluminum sub-base is required for the Flush Stair Nosing installations. Incizo can also be used for non-flush.

SOUND RATINGS | IIC: 74

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.



WATERPROOF FLOORING


Reclaimé is waterproof* thanks to a combination of the Uniclic® joint and HydroSeal coating.



HYDROSEAL

HydroSeal water-repellent edge coating keeps water from penetrating the floor's core.

*Fully waterproof when installed with a perimeter seal. Visit torlys.com details.

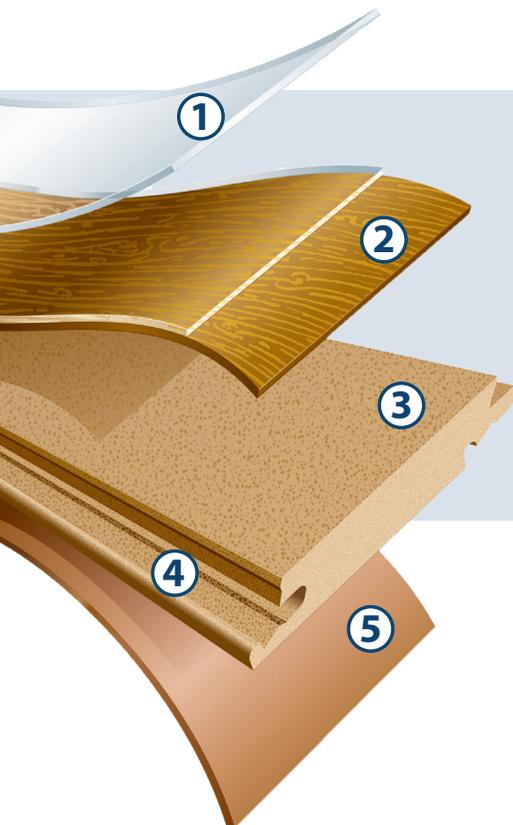

QUALITY BUILT IN

- 1. Top Layer** A top finishing layer to ensure your floor stays beautiful year after year.
- 2. Decorative Layer** Real wood-like patterns featuring natural designs.
- 3. TORLYS Smart Core** Dent resistant and strong.
- 4. TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today, finished with HydroSeal.
- 5. Bottom Layer** Provides moisture protection to the core and added stability.



35-Year Residential Limited Warranty for Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty. Reclaimé can be disassembled and re-used in another room or home.

10-Year Surface Waterproof Warranty; no time limit for standing water; damp-mopping allowed.

7-Year Limited Commercial Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty.

*Specific installation instructions apply.

