

PROFESSIONAL

Styleo



1/2" (T) X 7-1/2" (W) X 54-11/32" (L) (Nominal)
12 mm (T) X 190 mm (W) X 1380 mm (L)

16.93 SF per box

DETAILS

- Sophisticated rustic oak visuals.
- Matte finish.
- 12 mm waterproof laminate with HydroSeal.
- GenuEdge™ bevel enables the surface design and color to "roll over" the edge for the most realistic looks.
- Easy clean surface that can be wet and steam mopped.
- 4-sided bevel edge and stunning wood visuals and realistic EIR textures.
- Durable AC4 rated wear layer.
- Install Styleo up to 50'x 50' with no transitions or "speed bumps"!

GenuEdge™
TECHNOLOGY



TRANSITION FREE
INSTALLATION SYSTEM

Laminate



SNYDER OAK

NatureTEK™
PERFORMANCE WOOD PLUS



AUSTEN OAK
QS-UT9902



BARREL OAK
QS-UT9903



CAMPFIRE OAK
QS-UT9915



SNYDER OAK
QS-UT9919

ACCESSORIES



TORLYS Exclusive | smartSTEP Moulding

TORLYS laminates offer a unique smartSTEP moulding solution to add the perfect finishing touch to your installation. The smartSTEP is made from a full plank of flooring for a perfect colour, texture & dimension match. It also uses the same Uniclic® joint as the matching floor for an easy installation. A specially engineered metal plate can be used in conjunction with the smartSTEP to allow for a floating installation on landings.



Incizo 5-in-1 Moulding

A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding



Square Nose to Carpet



Reducer



Square Nose Edge Moulding



Flush Stair Nosing*

*An aluminum sub-base is required for the Flush Stair Nosing installations. Incizo can also be used for non-flush.

SOUND RATINGS | IIC: 74

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.



WATERPROOF FLOORING


Styleo is waterproof* thanks to a combination of the Uniclic® joint and HydroSeal coating.



HYDROSEAL

HydroSeal water-repellent edge coating keeps water from penetrating the floor's core.

*Fully waterproof when installed with a perimeter seal. Visit torlys.com details.

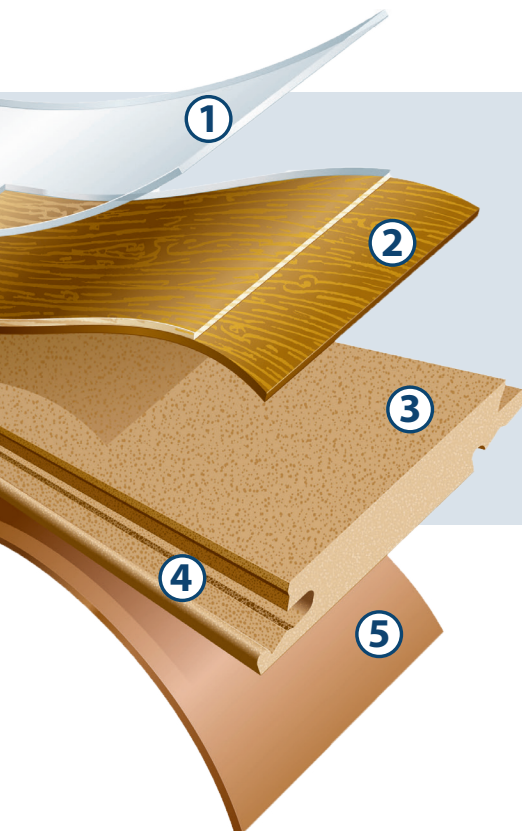

QUALITY BUILT IN

- 1. Top Layer** A top finishing layer to ensure your floor stays beautiful year after year.
- 2. Decorative Layer** Real wood-like patterns featuring natural designs.
- 3. TORLYS Smart Core** Dent resistant and strong.
- 4. TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today, finished with HydroSeal.
- 5. Bottom Layer** Provides moisture protection to the core and added stability.



35-Year Residential Limited Warranty for Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty. Styleo can be disassembled and re-used in another room or home.

10-Year Surface Waterproof Warranty; no time limit for standing water; damp-mopping allowed.

7-Year Limited Commercial Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty.

*Specific installation instructions apply.

