

PROFESSIONAL

Avenue



5/16" (T) X 7-9/16" (W) X 49-5/8" (L)
8mm (T) X 192mm (W) X 1261mm (L)

23.45 SF per box

DETAILS

- Made in Europe.
- Waterproof laminate with Aqua Protect to keep water from penetrating the core.
- Up to IIC 74 when paired with TORLYS Acoustik foam underlayment.
- AC4 rated wear layer.
- Four-sided bevel edge.
- Wide planks with realistic finishes.
- Extensive selection of on trend colours and patterns.
- Install Avenue up to 50'x 50' with no transitions or "speed bumps"!

TRANSITION FREE
INSTALLATION SYSTEM



Laminate



COLORADO OAK

TORLYS
PROEDGE
PREMIUM FLOORING

TORLYS
smart floors



ARTESIA OAK
TL-AV235-PEFC




LAUREL OAK
TL-AV233-PEFC



ALONDRA OAK
TL-AV231-PEFC




BOWERY OAK
TL-AV229-PEFC



NEWLANDS OAK
TL-AV227-PEFC



COLORADO OAK
TL-AV225-PEFC



LINCOLN WALNUT
TL-AV236-PEFC



VENTURA OAK
TL-AV234-PEFC



MELROSE OAK
TL-AV232-PEFC



BEVERLEY OAK
TL-AV230-PEFC



WESTWOOD OAK
TL-AV228-PEFC



HAWTHORNE OAK
TL-AV226-PEFC

ACCESSORIES

TORLYS
smartSTEP

TORLYS exclusive smartSTEP Moulding | Euro Square Profile**

TORLYS laminates offer a unique smartSTEP moulding solution to add the perfect finishing touch to your installation. The smartSTEP is made from a full plank of flooring for a perfect colour, texture & dimension match. It also uses the same Uniclic® joint as the matching floor for an easy installation. A specially engineered metal plate can be used in conjunction with the smartSTEP to allow for a floating installation on landings.



5-in-1 Moulding

A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding



Square Nose to Carpet



Reducer



Square Nose Edge Moulding



Flush Stair Nosing*

*An aluminum sub-base is required for the Flush Stair Nosing installations. 5-in-1 moulding can also be used for non-flush.

** Please check with TORLYS for availability.

SOUND RATINGS | IIC: 74

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.

TORLYS
Acoustik™



WATERPROOF FLOORING


Avenue is waterproof* thanks to a combination of the Uniclic® joint and Aquaprotect coating.



AQUAPROTECT

AquaProtect water-repellent edge coating keeps water from penetrating the floor's core.

*Fully waterproof when installed with a perimeter seal. Visit torlys.com details.

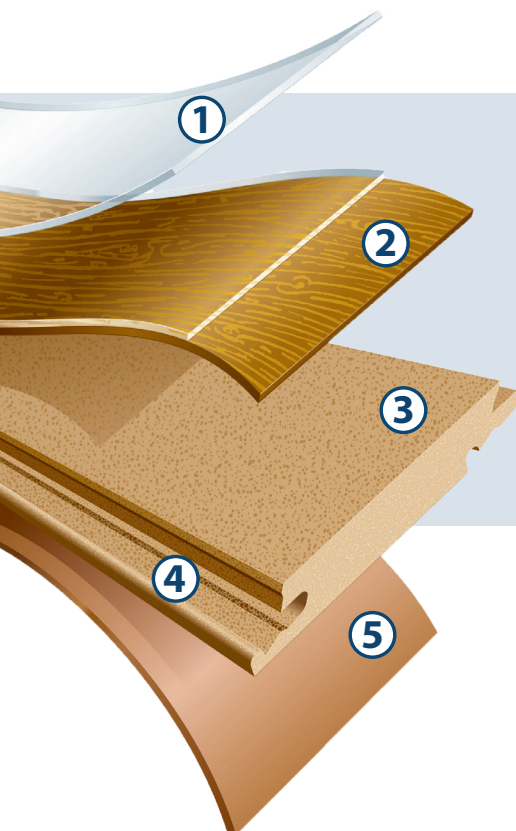

QUALITY BUILT IN

- 1.Top Layer** A top finishing layer to ensure your floor stays beautiful year after year.
- 2.Decorative Layer** Real wood-like patterns featuring natural designs.
- 3.TORLYS Smart Core** Dent resistant and strong.
- 4.TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today, finished with Aqua Protect.
- 5.Bottom Layer** Provides moisture protection to the core and added stability.

UNICLIC®

35-Year Residential Limited Warranty for Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty. Avenue can be disassembled and re-used in another room or home.

10-Year Surface Waterproof Warranty; no time limit for standing water; damp-mopping allowed.

7-Year Limited Commercial Wear, Stain, Fade, Structural and Joint Integrity/No Gapping Warranty.

*Specific installation instructions apply.



LEED®

NALFA
NORTH AMERICAN LAMINATE
FLOORING ASSOCIATION



torlys.com