

PROFESSIONAL

Classic Plus



5/16" (T) X 7-1/2" (W) X 47-1/4" (L) (Nominal)
8 mm (T) X 190 mm (W) X 1200 mm (L)

17.18 SF per box

DETAILS

- Authentically beautiful floor with a natural hardwood look.
- Contours are emphasized by natural authentic surface textures and fine seams around the edges and ends of each plank.
- Nano-bevelled edges – QS-UM1405 and QS-UM1653 have square edges.
- AC4 wear rating plus a protective wear layer to stand up against everyday scratches, stains and fading.
- 8mm waterproof laminate with Aqua Protect to keep water from penetrating the core.
- Install Classic Plus up to 50'x 50' with no transitions or "speed bumps"!

TRANSITION FREE
INSTALLATION SYSTEM



***Square Edges

Laminate



HAVANNA OAK NATURAL

TORLYS
PROEDGE
PREMIUM FLOORING

TORLYS
smart floors

OLD OAK NATURAL
QS-UM1381

OLD OAK GREY
QS-UM1382

OLD OAK DARK
QS-UM1383

OLD OAK LIGHT GREY***
QS-UM1405

MIDNIGHT OAK DARK
QS-UM1488

RECLAIMED
WHITE PATINA OAK***
QS-UM1653

HAVANNA OAK
NATURAL
QS-UM1655

HAVANNA OAK
NATURAL SAW CUT
QS-UM1656

HAVANNA OAK
DARK SAW CUT
QS-UM1657

ACCESSORIES

TORLYS
smartSTEP

TORLYS Exclusive | smartSTEP Moulding

TORLYS laminates offer a unique smartSTEP moulding solution to add the perfect finishing touch to your installation. The smartSTEP is made from a full plank of flooring for a perfect colour, texture & dimension match. It also uses the same Uniclic® joint as the matching floor for an easy installation. A specially engineered metal plate can be used in conjunction with the smartSTEP to allow for a floating installation on landings.



5-in-1 Moulding

A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding



Square Nose to Carpet



Reducer



Square Nose Edge Moulding



Flush Stair Nosing*

*An aluminum sub-base is required for the Flush Stair Nosing installations. 5-in-1 can also be used for non-flush.

SOUND RATINGS | IIC: 74

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.

TORLYS
Acoustik™



WATERPROOF FLOORING


Classic Plus is waterproof* thanks to a combination of the Uniclic® joint and AquaProtect coating.



AQUAPROTECT

AquaProtect water-repellent edge coating keeps water from penetrating the floor's core.

*Fully waterproof when installed with a perimeter seal. Visit torlys.com details.

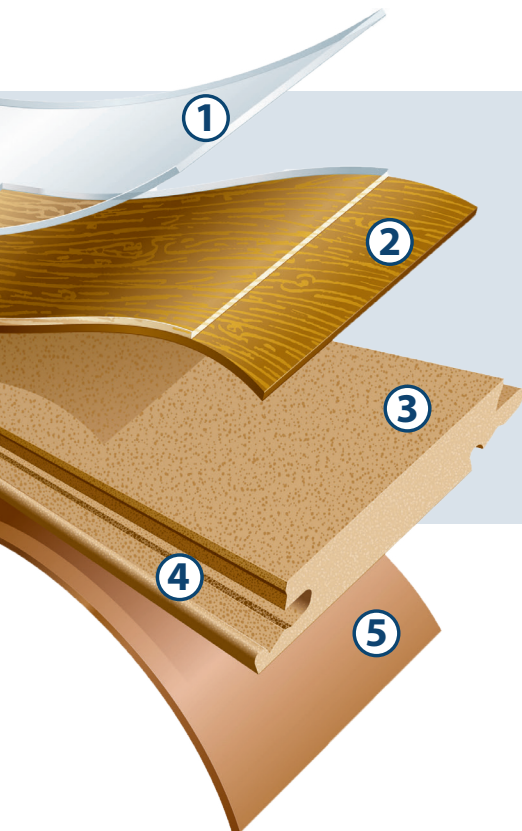

QUALITY BUILT IN

- 1. Top Layer** A top finishing layer to ensure your floor stays beautiful year after year.
- 2. Decorative Layer** Real wood-like patterns featuring natural designs.
- 3. TORLYS Smart Core** Dent resistant and strong.
- 4. TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today, finished with AquaProtect.
- 5. Bottom Layer** Provides moisture protection to the core and added stability.

UNICLIC®

35-Year Residential Limited Warranty for Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty. Classic Plus can be disassembled and re-used in another room or home.

10-Year Surface Waterproof Warranty; no time limit for standing water; damp-mopping allowed.

7-Year Limited Commercial Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty.

*Specific installation instructions apply.



LEED®

NALFA
NORTH AMERICAN LAMINATE
FLOORING ASSOCIATION

