**PROFESSIONAL** 

# Grand

5/16" (T) X 9-7/16" (W) X 80-11/16" (L) 8mm (T) X 240mm (W) X 2050mm (L)

37.07 SF per box

#### **DETAILS**

- Made in Europe.
- Up to IIC 74 when paired with TORLYS Acoustik foam underlayment.
- AC4 rated wear layer.
- Four-sided bevel edge.
- Extra long and wide planks to create an expansive look.
- The perfect range of modern colours and styles.
- Install Grand up to 50'x 50' with no transitions or "speed bumps"!







# TORLYS smart floors



## **ACCESSORIES**



#### TORLYS exclusive smartSTEP Moulding | Euro Square Profile\*\*

TORLYS laminates offer a unique smartSTEP moulding solution to add the perfect finishing touch to your installation. The smartSTEP is made from a full plank of flooring for a perfect colour, texture & dimension match. It also uses the same Uniclic® joint as the matching floor for an easy installation. A specially engineered metal plate can be used in conjunction with the smartSTEP to allow for a floating installation on landings.



#### 5-in-1 Moulding

A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.











T-Moulding

Square Nose to Carpet

Reducer


Square Nose Edge Moulding

Flush Stair Nosing\*

## **SOUND RATINGS | IIC: 74**

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.



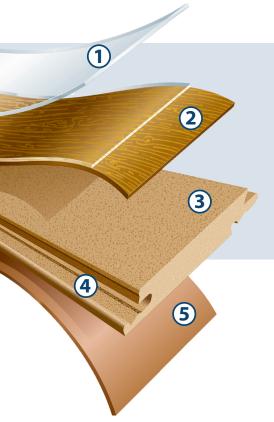

# **QUALITY BUILT IN**

- **1.Top Layer** A top finishing layer to ensure your floor stays beautiful year after year.
- **2.Decorative Layer** Real wood-like patterns featuring natural designs.
- **3.TORLYS Smart Core** Dent resistant and strong.
- **4.TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today.



**5.Bottom Layer** Provides moisture protection to the core and added stability.



7-Year Limited Commercial Wear, Stain, Fade, Structural and Joint Integrity/No Gapping Warranty.









<sup>\*</sup>An aluminum sub-base is required for the Flush Stair Nosing installations. 5-in-1 moulding can also be used for non-flush.

<sup>\*\*</sup> Please check with TORLYS for availability.