

# EverWood™ Designer


**TORLYS**  
smart floors



BRIGHTON HILL

-  Waterproof
-  Warm&Quiet
-  Transition Free
-  Antimicrobial
-  Scratch Resistant
-  Flood Warranty
-  Easily Repairable
-  Dent Resistant
-  Gap Resistant

# EverWood™ Designer

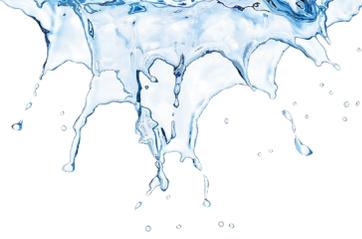

**5/16" (T) x 7" (W) x 72" (L)**  
**8.3mm (T) x 180mm (W) x 1830mm (L)**

**28.37 SF per box**  
**54 boxes per pallet**

## Details

- On-trend styles and realistic textures in the longest and widest planks make the difference.
- Matching bevels with a contemporary colour palette: warm to the touch, comfortable and quiet underfoot.
- 0.5mm (20mils) wear layer.
- 4-sided finished bevels.
- Microban® antimicrobial product protection is built in to the CorkPlus™ Blue attached underlay for the ultimate in mold & mildew protection.

*Check installation instructions/warranty for details.*

## The Original WPC Vinyl



### Waterproof

EverWood™ Designer is 100% waterproof - backed by TORLYS exclusive Flood Warranty.



### Transition Free

EverWood™ Designer is a remarkably stable floor that can be installed transition free in spaces up to 80' x 80' no more "speed bumps" in doorways or long hallways.\*

*\*Visit [torlys.com](http://torlys.com) for full details.*

**TORLYS**  
**Bulldog™**  
EASY PLANK REPLACER

### TORLYS Bulldog™ Easy Plank Replacer

TORLYS Bulldog™ enables single planks and tiles to be replaced, quickly and easily. No mess, no dust, no downtime.

*\*High Shade Variation*



CABLE BAY\*

EW-27005

HARRINGTON\*

EW-27001

HIGH POINT

EW-27004

BRIGHTON HILL

EW-27002

SEABRIGHT\*

EW-27008

ROCKLAND\*

EW-27009

SPANISH POINT\*

EW-27007

NORTHCLIFFE

EW-27006

CAMDEN

EW-27000

SONESTA

EW-27003

# A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.



TORLYS Maxx Commercial Finish with built-in antimicrobial protection will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit [torlys.com/CleanerFloors](http://torlys.com/CleanerFloors).



SPANISH POINT



## Finishing Touches

### TORLYS Smart Trims

A waterproof Multi-Function Transition Moulding that offers an adaptable and colour coordinated profile. Suitable for floating applications.\*

### Euro Stair Nose

A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

\*See installation instructions for details.

## Sustainability

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, TORLYS will offer a 10% credit towards the purchase of a new floor when your existing TORLYS Smart Floor is donated to Habitat for Humanity.\*

\*Visit [torlys.com](http://torlys.com) for details.

## Warranty

### Lifetime Residential S.M.A.R.T. Warranty

### 15-Year Commercial Warranty

EverWood™ Designer is covered by an exclusive Flood Warranty. Fully waterproof when installed with a perimeter seal.\*

\*Visit [torlys.com](http://torlys.com) for full warranty and installation information.

## Peace of Mind Assurance

Peace of Mind Assurance with TORLYS Satisfaction Guarantee - Love the style and colour of your floors or change them - no questions asked.\*

## Healthy Home - Indoor Air Quality

We follow some of the most stringent standards in the world. TORLYS flooring products meet California Section 01350 and/or FloorScore® certification.

## ASTM and ANSI Product Performance Tests

\*Visit [torlys.com](http://torlys.com) for details.

Standard	Description	Test Result	Notes
ASTM E648-14a	Critical Radiant Flux	Average Critical Radiant Flux: 0.72 W/cm <sup>2</sup>	NFPA 101 Classification: Class 1
ANSI A137.1-2012 (aka DCOF AcuTest)	Coefficient of Friction (Floor Slip Resistance): a) Dynamic Coefficient of Friction (wet) Coefficient of Friction (Floor Slip Resistance): b) Static Coefficient of Friction (dry)	Mean Result: 0.43  Mean Result: 0.80	ANSI A137.1-2012 / DCOF AcuTest replaces ASTM C1028-07*
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI Static Load Limit / Residual Indentation @ 1000 PSI	0.003 inches  0.055 inches	
ASTM C518	Thermal Resistance	SI Units 0.10 K◻m <sup>2</sup> /W	Imperial Units 0.59◻F◻ft <sup>2</sup> •h/BTU◻in
ASTM F925-02	Resistance to Chemicals	0 = No Change	
ASTM F1515	Resistance to Light	ΔE ≤ 8	Test result after 300 hours exposure
CPSC-CH-C1001-09.3 (California Proposition 65)	Phthalates	Does not contain phthalate esters	
ASTM E492-09 / ASTM E989-06	Impact Insulation Class	IIC 74	Testing on 8" concrete slab, with suspended ceiling
ASTM E90-04 / ASTM E413-10	Sound Transmission Coefficient	STC 66	Testing on 8" concrete slab, with suspended ceiling

\*Note: "Obsolete, misleading test withdrawn by ASTM in 2014. Not valid for assessing pedestrian safety." <http://www.astm.org/Standards/C1028.htm>



## How It's Made

### 1) Top Layer

Ultra-thick 0.5mm (20 mils) wear layer for ultimate wear resistance

### 2) Decorative Layer

Beautiful, authentic look and fade resistant

### 3) TORLYS Ultra-Stable Smart Core

More than twice as thick as the industry standard

### 4) TORLYS Uniclic® Joint

Gap-free installations and easy repairs with TORLYS Bulldog™ Easy Plank Replacer

### 5) TORLYS CorkPlus™ BLUE Underlay

Quiet, comfortable, built-in underlay with Microban® antimicrobial product protection