


# RigidWood<sup>™</sup> **FIRM** Vista



## THE SMART ADVANTAGE SPC

PROFESSIONAL

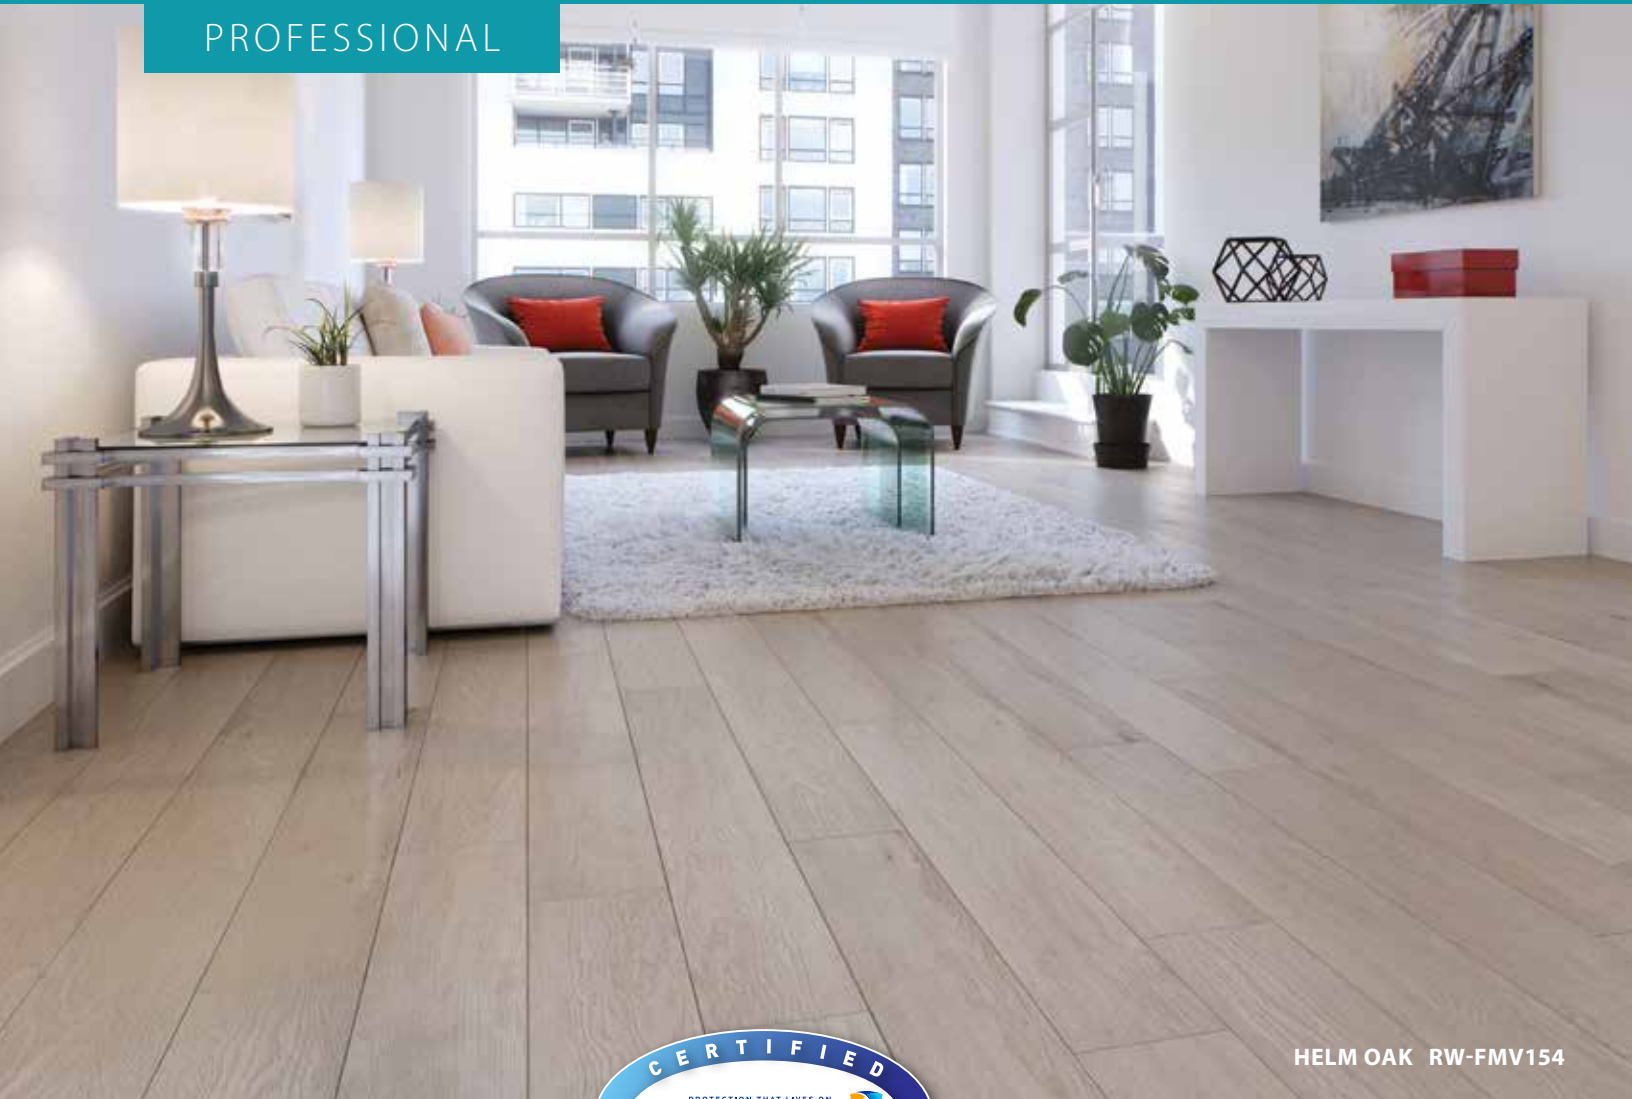

HELM OAK RW-FMV154



**TORLYS**  
smart floors

[torlys.com](http://torlys.com)

### Visuals, Value & Performance.

RigidWood<sup>™</sup> Firm is a 5-layer continuous press construction that offers all of the benefits of a TORLYS Smart Floor in an SPC vinyl. The Smart Core with the Unliclic<sup>®</sup> joint adds another level of stability which allows for transition free installations in spaces up to 70'x70' - any room, anywhere.

# TORLYS Smart Advantage



## WATERPROOF FLOORING

RigidWood™ is 100% waterproof – exclusively backed by TORLYS Flood Warranty.



## TORLYS FLOOD WARRANTY

RigidWood™ is protected from water damage to the floors caused by floods with TORLYS Flood Warranty.



## TORLYS BULLDOG™ EASY PLANK REPLACER

TORLYS Bulldog™ enables single planks of RigidWood™ to be replaced, quickly and easily. No mess, no dust, no downtime.



## MICROBAN®

With Microban® product protection built-in, the lifetime of the floor is extended by inhibiting the growth of degrading microbes while keeping the floor cleaner between cleanings.



## TRANSITION FREE

Install RigidWood™ floors transition free, up to 70'x70' - no more "speed bumps" in long hallways or doorways.





# Vista




5/32" (T) x 6" (W) x 47-3/4" (L) (nominal)  
4.5mm (T) x 150m (W) x 1211mm (L)

12mil / 0.3mm wear layer

- Beautiful, lightly textured surfaces
- Matching painted bevels
- Superior scratch and stain resistance with TORLYS Maxx Finish
- TORLYS Maxx Finish with Microban® product protection keeps floors cleaner between cleanings
- Remarkable dimensional stability – peak/gap free – withstands 70°C temperature swings from -20°C - +50°C
- More dent resistant than traditional LVT
- No transitions in 70' x 70' spaces\*
- Can be fixed and floated on same floor\*
- TORLYS FoamPlus™ Blue Underlay attached with Microban® antimicrobial protection built in
- Suitable to install over radiant heat\*
- Conforms to subfloor for a quieter, more solid feel
- Matching flush stair nosing available
- IIC up to 73\*


*\* Visit [www.torlys.com](http://www.torlys.com) for more information or contact TORLYS for details.*

A close-up image of a dark brown wood grain pattern, identified as Foremast.

FOREMAST RW-FMV150

A close-up image of a light grey wood grain pattern, identified as Spinnaker.

SPINNAKER RW-FMV151

A close-up image of a medium brown wood grain pattern, identified as Deck Oak.

DECK OAK RW-FMV152

A close-up image of a greyish-brown wood grain pattern, identified as Bluepeter.

BLUEPETER RW-FMV153

A close-up image of a light brown wood grain pattern, identified as Helm Oak.

HELM OAK RW-FMV154

# ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648-17	Critical Radiant Flux	Average Critical Radiant Flux: $\geq 0.45 \text{ W/cm}^2$	NFPA Life Safety Code 101 Classification: Class 1
ASTM E662-17a	Smoke Density	$\leq 450$	Passes $\leq 450$ Criteria, as per NFPA Life Safety Code 101
Phthalates, as per CPSC-CH-C1001-09.3 (California Proposition 65)	Phthalates	Does not contain phthalate esters	
RoSH	Heavy Metals	Pass	
ASTM D5116-10 (Small Chamber)	Formaldehyde Emissions	No Formaldehyde	
ANSI A137.1-2012 (aka DCOF AcuTest)	Coefficient of Friction (Floor Slip Resistance): a) Dynamic Coefficient of Friction(wet) Coefficient of Friction (Floor Slip Resistance): b) Static Coefficient of Friction (dry)	Mean Result: 0.44  Mean Result: 0.49	Passes the $\geq 0.42$ requirement
ASTM F925	Resistance to Chemicals	Slight Surface Change / Dulling by White Mineral Oil and NaOH Solution	The scale is 0-3; 0 = no change; 1 = slight change; 2 = moderate change; 3 = severe change
ASTM F1515	Resistance to Light	$\Delta E \leq 8$	Test result after 400 hours exposure
ASTM E492-09 (2016) - ASTM E989-06 (2012)	Impact Insulation Class	IIC up to 73	Contact TORLYS for details.
ASTM E90-09 (2016) / ASTM E413 - 16	Sound Transmission Coefficient	STC 61	

## Warranties

**20-Year Homeowner Limited Warranty** for Wear, Stain, and Water; and a Lifetime Structural and Joint Integrity/No Gapping Warranty.

**5-Year Limited Commercial,** Wear, Structural and Joint Integrity/No Gapping Warranty.

**Flood Warranty:** RigidWood™ Firm Vista is covered by an exclusive Flood warranty. Fully waterproof when installed with a perimeter seal. Visit [torlys.com](http://torlys.com) for full warranty and installation information.



**TORLYS**  
smart floors

[torlys.com](http://torlys.com)

MK-BL-RW906