


RigidTile[™] **FIRM** Premier



THE SMART ADVANTAGE SPC

PROFESSIONAL

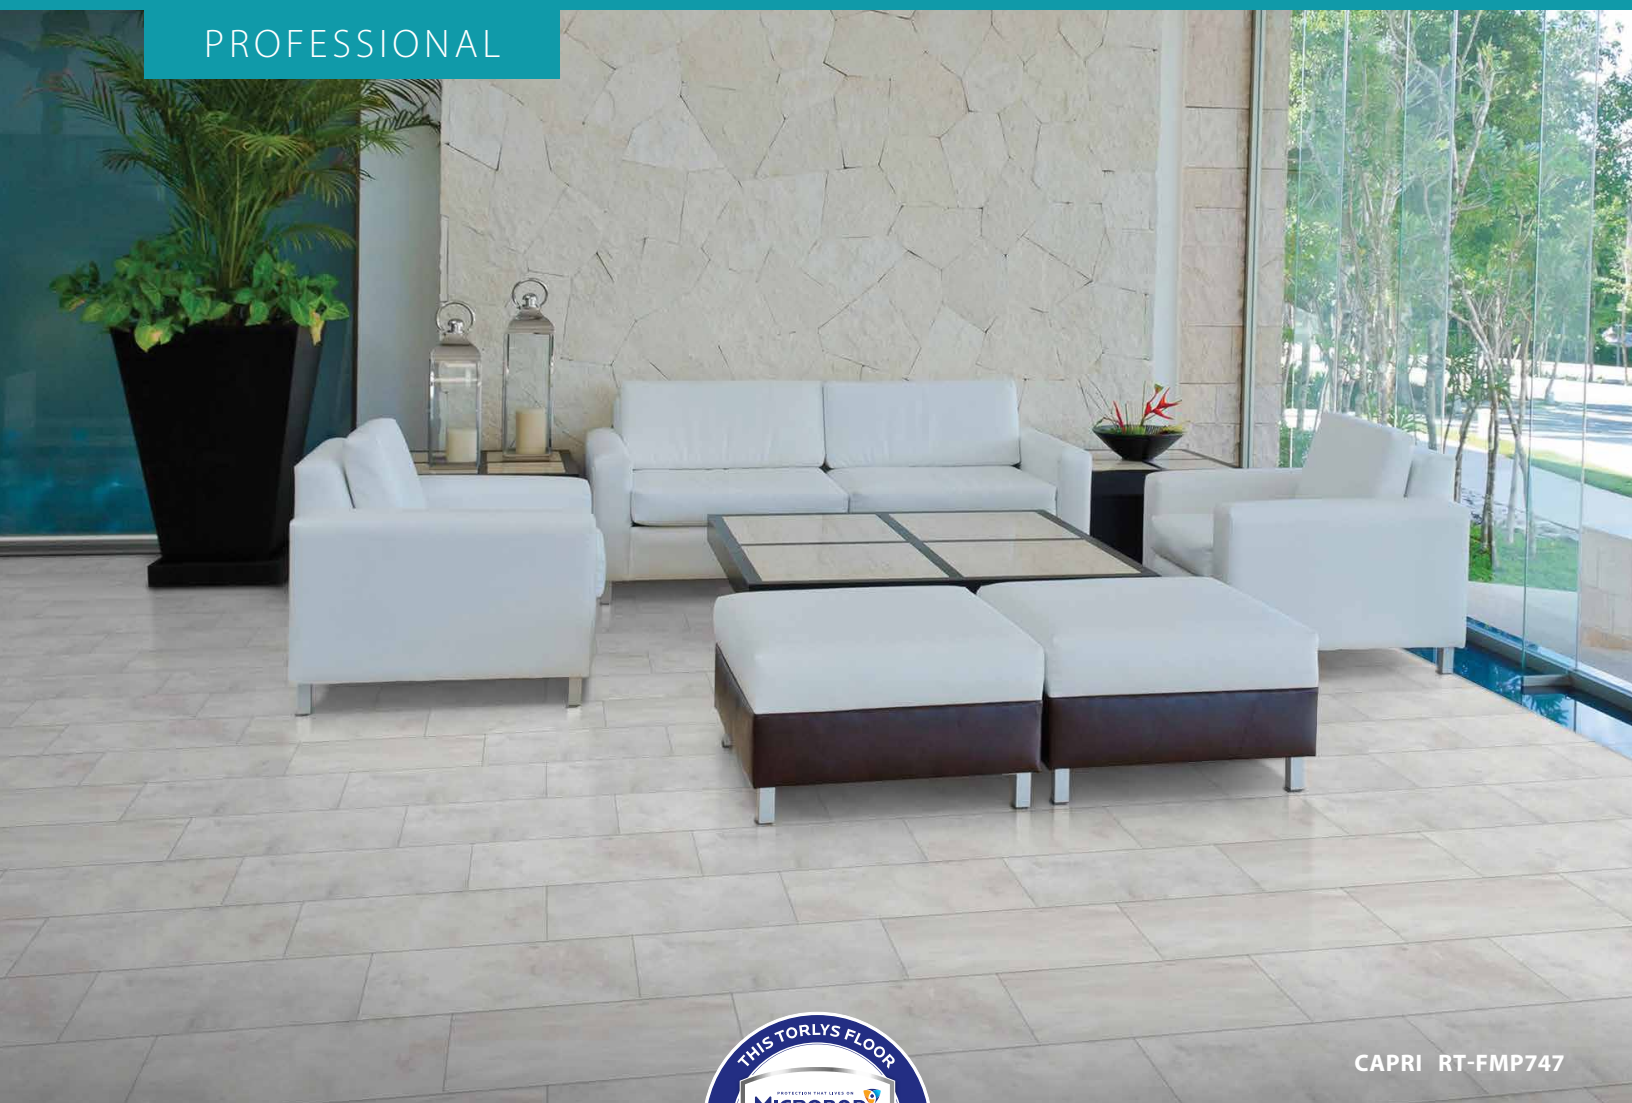

CAPRI RT-FMP747

TORLYS
smart floors

torlys.com

Visuals, Value & Performance.

RigidTile[™] Firm is a 5-layer continuous press construction that offers all of the benefits of a TORLYS Smart Floors in an SPC Vinyl. RigidTile[™] Firm Premier has 5 designs in beautiful matte finishes; a perfect alternative to porcelain or stone tile.

TORLYS Smart Advantage



WATERPROOF FLOORING

RigidTile™ is 100% waterproof – exclusively backed by TORLYS Flood Warranty.



TORLYS FLOOD WARRANTY

RigidTile™ is protected from water damage to the floors caused by floods with TORLYS Flood Warranty.



TORLYS BULLDOG™ EASY PLANK REPLACER

Enables single planks of RigidTile™ to be replaced, quickly and easily. No mess, no dust, no downtime.



FOAMPLUS™ BLUE WITH MICROBAN®

Superior sound reduction and shock-absorption with anti-crush technology. Infused with Microban® technology during the manufacturing process for proven 24/7 defense against mold and odor causing bacteria.



TRANSITION FREE

Install RigidTile™ floors transition free, up to 70'x70' - no more "speed bumps" in long hallways or doorways.





Premier



3/16" x 12" x 24" (nominal)

22 mil wear layer

5mm (1mm IXPE) x 303.1mm x 607.2mm

0.55mm wear layer

- Perfect flooring for all seasonal spaces including cottages and sunrooms.*
 - Remarkable dimension stability that will withstand temperature swings from -4°F to 122°F (-20°C to 50°C).
 - No peaking, no gapping and no cupping – guaranteed!
 - Install directly over other hard surfaces with minimal subfloor preparation.
 - Transition Free up to 70'x70' (21m x 21m) and can be fixed/floated on the same floor.*
- Realistic grout lines color coordinated to the stunning tile patterns.
- TORLYS FoamPlus™ Blue attached underlay has built-in 24/7 protection against mold and odor causing bacteria, extending the lifetime of the floor.
- TORLYS Maxx Commercial Finish resists high traffic scratches and staining and features built-in antimicrobial protection to keep floors cleaner between cleanings.

**Please refer to installation instructions for complete details.*

A large rectangular tile with a mottled grey and blue-grey finish, showing a subtle texture.


METRO GREY RT-FMP745

A large rectangular tile with a dark brown, almost black, mottled finish, showing a subtle texture.

AMHERST RT-FMP746

A large rectangular tile with a light grey and white mottled finish, showing a subtle texture.

CAPRI RT-FMP747

A large rectangular tile with a light beige and cream mottled finish, showing a subtle texture.

MODENA RT-FMP748

A large rectangular tile with a dark, almost black, marble pattern with white and light grey veins.

NERO RT-FMP749

ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648-17	Critical Radiant Flux	Average Critical Radiant Flux: $\geq 0.45 \text{ W/cm}^2$	NFPA Life Safety Code 101 Classification: Class 1
ASTM E662-17a	Smoke Density	≤ 450	Passes ≤ 450 Criteria, as per NFPA Life Safety Code 101
Phthalates, as per CPSC-CH-C1001-09.3 (California Proposition 65)	Phthalates	Does not contain phthalate esters	
RoSH	Heavy Metals	Pass	
ASTM D5116-10 (Small Chamber)	Formaldehyde Emissions	No Formaldehyde	
ANSI A137.1-2012 (aka DCOF AcuTest)	Coefficient of Friction (Floor Slip Resistance): a) Dynamic Coefficient of Friction(wet) Coefficient of Friction (Floor Slip Resistance): b) Static Coefficient of Friction (dry)	Mean Result: 0.44 Mean Result: 0.49	Passes the ≥ 0.42 requirement
ASTM F925	Resistance to Chemicals	Slight Surface Change / Dulling by White Mineral Oil and NaOH Solution	The scale is 0-3; 0 = no change; 1 = slight change; 2 = moderate change; 3 = severe change
ASTM F1515	Resistance to Light	$\Delta E \leq 8$	Test result after 400 hours exposure
ASTM E492-09 (2016) - ASTM E989-06 (2012)	Impact Insulation Class	IIC up to 73	Contact TORLYS for details.
ASTM E90-09 (2016) / ASTM E413 - 16	Sound Transmission Coefficient	STC 61	

Warranties

25-Year Homeowner Limited Warranty for Wear, Stain, and Water; and a Lifetime Structural and Joint Integrity/No Gapping Warranty.

10-Year Limited Commercial, Wear, Structural and Joint Integrity/No Gapping Warranty.

Flood Warranty: RigidTile™ Firm Premier is covered by an exclusive Flood warranty. Fully waterproof when installed with a perimeter seal. Visit torlys.com for full warranty and installation information.



TORLYS
smart floors

torlys.com

Jan 2021