


# **EVERWOOD<sup>TM</sup>** Premier

*the ultimate flooring.*



PROFESSIONAL

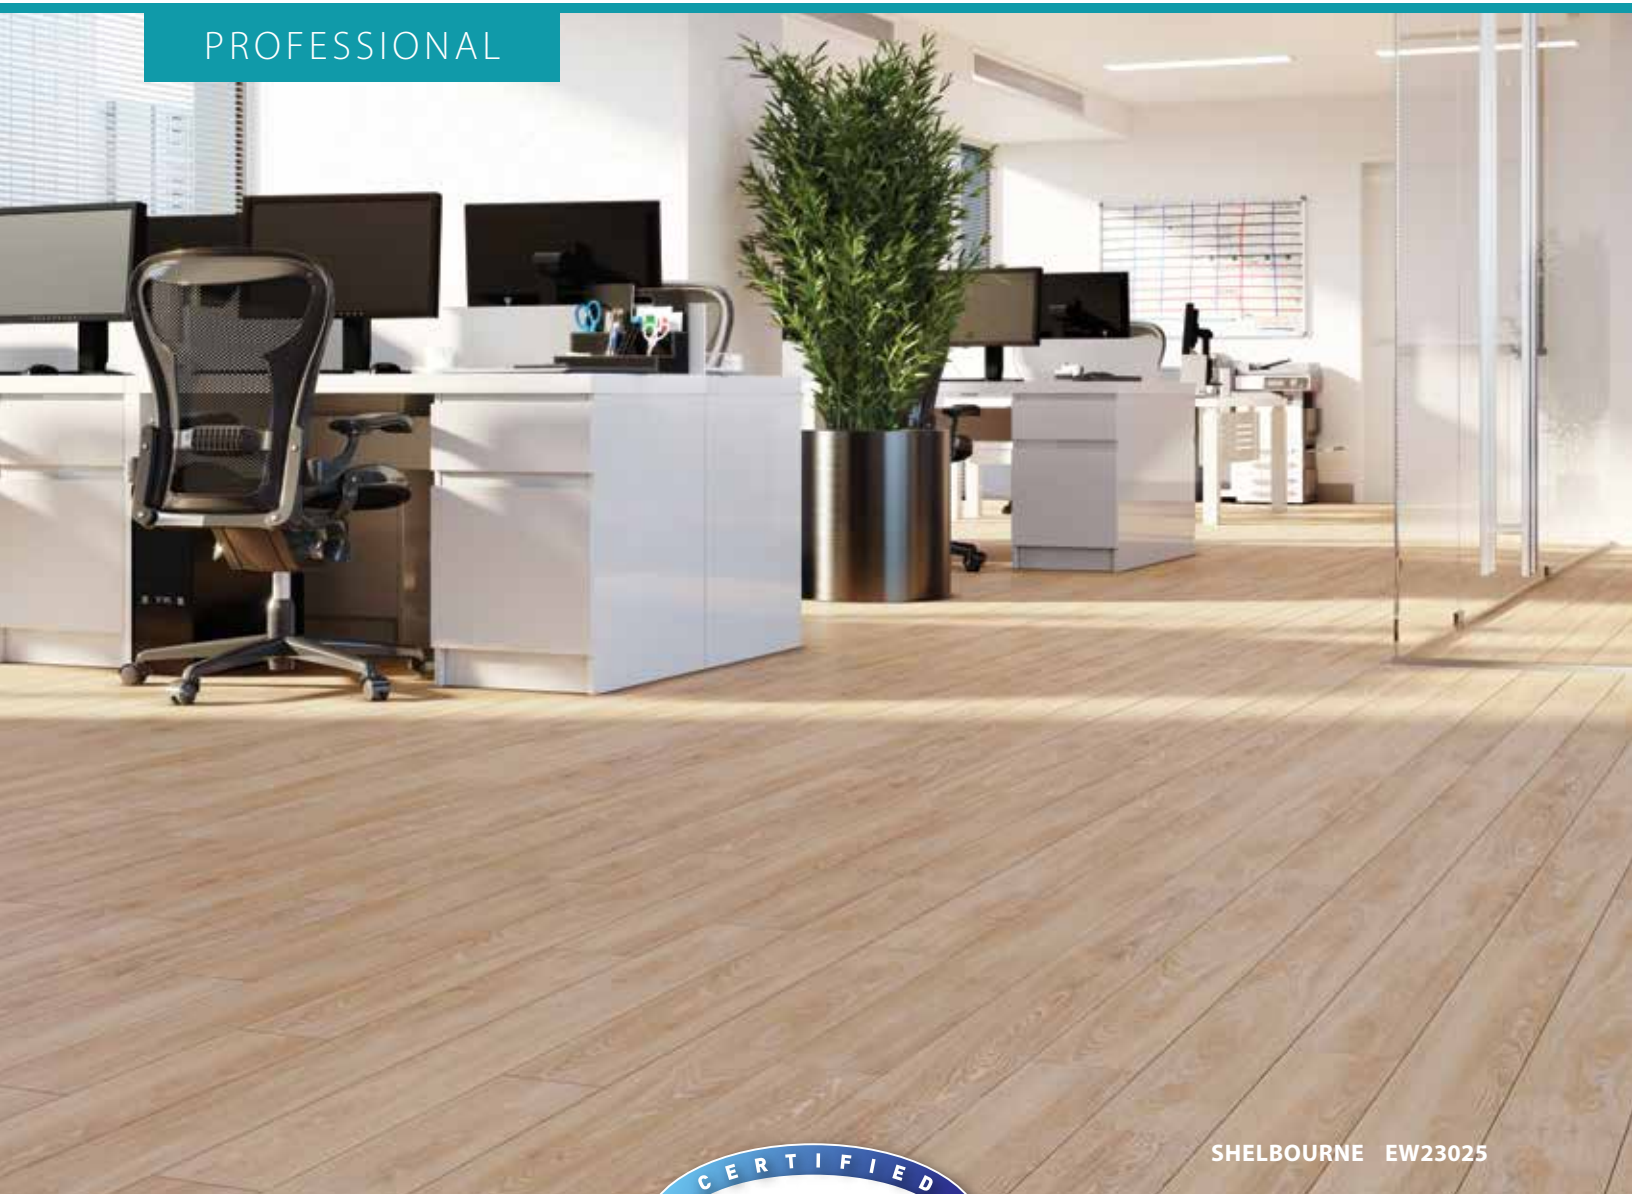

SHELBOURNE EW23025

The Seal of Science.



The Art of Flooring.

**TORLYS**  
smart floors

[torlys.com](http://torlys.com)

## **Beautiful. Durable. Waterproof.**

No other luxury vinyl floor combines the unique scientific benefit of Microban® antimicrobial product protection with outstanding looks and high-traffic durability. Now you can have it all! Beautiful, precision-crafted luxury vinyl floors with stunning, on-trend planks that are waterproof, warm and quiet.

The Ultimate.  
**Engineering and design.**

## How It's Made.

### 1) Top Layer

Ultra-thick 0.5mm (20 mils) wear layer for ultimate wear resistance

### 2) Decorative Layer

Beautiful, authentic look and fade resistant

### 3) TORLYS Ultra-Stable Smart Core

More than twice as thick as the industry standard

### 4) TORLYS Uniclic® Joint

Gap-free installations and easy repairs\*\* with TORLYS Bulldog Easy Plank Replacer™

### 5) TORLYS CorkPlus™ BLUE Underlay

Quiet, comfortable, built-in underlay with Microban® antimicrobial product protection



The Ultimate.  
**TORLYS exclusives.**



### TORLYS BULLDOG™ Easy Plank Replacer "Your Floor's Best Friend"

The Bulldog™ allows you to:

- Fix major mishaps quickly and easily.
- Replace a damaged plank, not your entire floor.\*\*



### Uniclic® joint technology – for remarkably stable, gap resistant floors.

Side and end joints have patented Uniclic joints, a system exclusively engineered for EverWood – the only floor backed by a gap warranty.



### TORLYS Flood Warranty

EverWood & EverTile are protected from water damage caused by floods with TORLYS Flood Warranty.

*\*\*On floating installations.*

## The Microban® Advantage.

EverWood inhibits mold and mildew under the floor with a patented CorkPlus™ BLUE attached underlay made with Microban® antimicrobial product protection.



Ultra-Stable



Waterproof



Gap  
Resistant



Warm &  
Quiet



Ease of  
Repair



Peace-  
of-Mind  
Durability



Easy to  
Maintain



Dent  
Resistant



Clean and  
Healthy



Pet  
Friendly

# EVERWOOD<sup>TM</sup>

## Premier



EverWood<sup>TM</sup> creates a feeling of warmth from the smallest space to the largest, free of transitions or expansion joints.\*\*

### Stunning colours and textures.

5/16" (T) x 4-7/8" (W) x 48-3/8" (L)  
8.3mm (T) x 123mm (W) x 1230 mm (L)

- Beautifully designed wide planks
- Micro-bevels and low-gloss finish
- Softly textured, warm, comfortable and quiet underfoot
- 0.5mm (20mils) wear layer
- 4-sided finished bevels
- Microban<sup>®</sup> antimicrobial product protection is built in to the CorkPlus<sup>™</sup> BLUE attached underlay for the ultimate in mold & mildew protection

*\*\*Floors over 80 feet may require expansion joints.*



### Warranties

**10-Year Limited Commercial**, Wear, Structural and Joint Integrity/No Gapping Warranty.

**25-Year Homeowner Limited Warranty** for Wear, Stain, and Water; and a Lifetime Structural and Joint Integrity/No Gapping Warranty.

EverWood<sup>™</sup> Premier is covered by an exclusive Flood Warranty. For details visit [torlys.com](http://torlys.com).

BEACH HOUSE\* EW23001 \*High Shade Variation

COBBLE BEACH\* EW23003 \*High Shade Variation

OYSTER BAY EW23005

ROCKWOOD EW23006

SANDY RIDGE EW23007

SPRING CREEK EW23008

SOMERSET EW23009

AVALON EW23010

BRANCHPORT\* EW23022 \*High Shade Variation

APPALACHAIN\* EW23023 \*High Shade Variation

SIERRA EW23024

SHELBOURNE EW23025



## The Ultimate. Finishing touches.



### Flush Reducer

Made from the same top layer as your floor, this reducer is designed specifically for EverWood™ & EverTile™ and will install flush with the flooring.



### Flush Stair Nosing

Made from the same top layer as your floor, the floor is clicked into the nosing for a flawless look, without transition bumps.



### ThinStrip T-Moulding

A unique, extreme low profile transition moulding with a 1mm edge that is colour matched to the floor with a polyurethane coating for extra wear resistance. It is bendable for height variations between floors and uses a self-adhesive strip for easy installation.

## Specially designed mouldings.

### Design Flexibility...Clean Lines.

Imagine a floor with the embossed grain and tangible beauty of real hardwood. One that stands up to the demands of everyday use and can be installed with spectacular results in any space.

### Hallways and Stairs

A style-matched, flush stair nosing creates a durable edge with clean lines.

### From Room to Room

The reducer and stair nosing for EverWood are installed flush with the flooring, for a smooth and flawless look. Enjoy a seamless look from one room to another – no “speed bumps”.

*\*Floors over 80 linear ft. may require expansion joints.*

## ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648-14a	Critical Radiant Flux	Average Critical Radiant Flux: 0.72 W/cm <sup>2</sup>	NFPA 101 Classification: Class 1
ANSI A137.1-2012 (aka DCOF AcuTest)	Coefficient of Friction (Floor Slip Resistance) a) Dynamic Coefficient of Friction (wet) Coefficient of Friction (Floor Slip Resistance) b) Static Coefficient of Friction (dry)	Mean Result: 0.43  Mean Result: 0.80	ANSI A137.1-2012 / DCOF AcuTest replaces ASTM C1028-07*
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI  Static Load Limit / Residual Indentation @ 1000 PSI	0.003 inches  0.055 inches	
ASTM C518	Thermal Resistance	SI Units 0.10 K•m <sup>2</sup> /W	Imperial Units 0.59°F•ft <sup>2</sup> •h/BTU•in
ASTM F925-02	Resistance to Chemicals	0 = No Change	
ASTM F1515	Resistance to Light	ΔE ≤ 8	Test result after 300 hours exposure
CPSC-CH-C1001-09.3 (California Proposition 65)	Phthalates	Does not contain phthalate esters	
ASTM E492-09 / ASTM E989-06	Impact Insulation Class	IIC 74	Testing on 8" concrete slab, with suspended ceiling
ASTM E90-04 / ASTM E413-10	Sound Transmission Coefficient	STC 66	Testing on 8" concrete slab, with suspended ceiling

\*Note: "Obsolete, misleading test withdrawn by ASTM in 2014. Not valid for assessing pedestrian safety."  
<http://www.astm.org/Standards/C1028.htm>



MK-BL-EW914