

RigidWood[™] Vista



THE SMART ADVANTAGE LVT

PROFESSIONAL



EDGECOMB RW-V003

TORLYS
smart floors

torlys.com

The Perfect Rigid LVT Floor.

RigidWood[™] Vista has all the performance benefits of a TORLYS smart floor...now in Rigid LVT. The Flexibility you want. The Rigidity you need. Only RigidWood[™] Vista offers a quiet, solid-feeling floor with no peaking, gapping, or cupping.

TORLYS Exclusives



TORLYS BULLDOG™ EASY PLANK REPLACER “Your Floor’s Best Friend”

The Bulldog allows you to:

- Fix major mishaps quickly and easily.
- Replace a damaged plank, not your entire floor.

TORLYS dealers can easily replace damaged or dented pieces. No glue. No nails.



UNICLIC® JOINT TECHNOLOGY

For remarkably stable, gap resistant floors. Side and end joints have patented Uniclic® joint technology, and floors are backed by a gap warranty.



TORLYS FLOOD WARRANTY

RigidWood™ is protected from water damage caused by floods with TORLYS Flood Warranty.


Stable and Flexible Construction



The diagram shows a cross-section of a floor plank with five numbered layers: 1) a thin top layer, 2) a thicker middle layer, 3) a decorative top surface, 4) a thick, textured core, and 5) a bottom layer with a joint.

- 1) Scratch Resistant Finish
- 2) Heavy Duty Wear Layer
- 3) Decorative Print Film
- 5) Rigid Core with Patented Uniclic® Joint



-  Extra-Stable
-  Waterproof
-  Gap Resistant
-  Warm & Quiet
-  Ease of Repair
-  Peace-of-Mind Durability
-  Easy to Maintain
-  Dent Resistant
-  Clean and Healthy
-  Pet Friendly

RigidWood™

Vista*



Striking wood styles in 5" wide planks.


RigidWood Vista's 4-layer construction makes it perfect for concrete and irregular subfloors, and a reliable option for all season flooring in residential or commercial applications.

1/8" (T) x 5" (W) x 47-3/4" (L) (nominal)
3.5mm (T) x 126mm (W) x 1211mm (L)


- Beautiful deep textured surfaces
- Conforms to subfloor for a quieter, more solid feel
- Creates remarkable dimensional stability – peak/gap free*** – withstands 80°C temperature swings from -30°C - +50°C (-22°F to +122°F)
- No transitions in 80' x 80' spaces***
- Matching painted bevels
- Can be fixed and floated on same floor
- More dent resistant than traditional LVT
- IIC: 75 (when paired with TORLYS XV Underlay)
- Superior scratch and stain resistance
- Suitable to install over radiant heat
- Matching flush stair nosing available

*RigidWood Vista does not include FoamPlus BLUE underlay.


***Check installation instructions and warranty for details.




HARBOUR RW-V000-NP

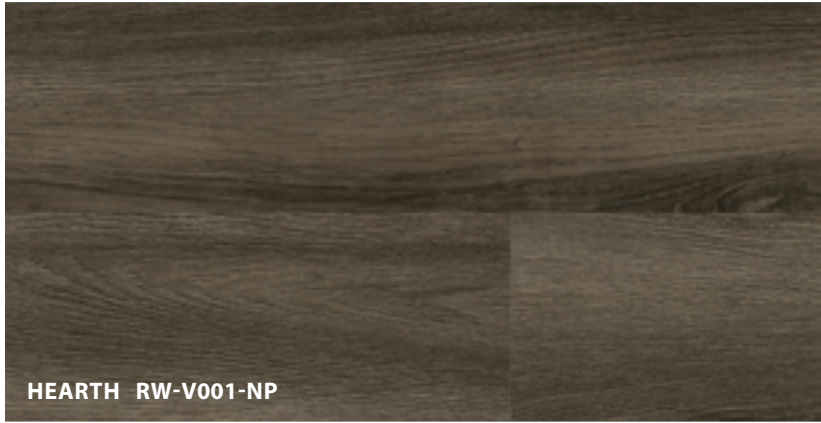

HEARTH RW-V001-NP



SIMCOE** RW-V002-NP **High Shade Variation



EDGECOMB RW-V003-NP



WHEATFIELD RW-V004-NP

ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648-17	Critical Radiant Flux	Average Critical Radiant Flux: 0.80 W/cm ²	NFPA Life Safety Code 101 Classification: Class 1
ASTM E662-17a	Smoke Density	Average Dm (corrected) – Flaming: 346 Average Dm (corrected) – Non-Flaming: 337	Passes ≤450 Criteria, as per NFPA Life Safety Code 101
Phthalates, as per CPSC-CH-C1001-09.3 (California Proposition 65)	Phthalates	Does not contain phthalate esters	
ASTM D5116-10 (Small Chamber)	Formaldehyde Emissions	No Formaldehyde	
ANSI A137.1-2012 (aka DCOF AcuTest) Replaces ASTM C1028-07*	Coefficient of Friction (Floor Slip Resistance): a) Dynamic Coefficient of Friction(wet) Coefficient of Friction (Floor Slip Resistance): b) Static Coefficient of Friction (dry)	Mean Result: 0.44 Mean Result: 0.49	Passes the ≥ 0.42 requirement
ASTM F925	Resistance to Chemicals	Slight Surface Change / Dulling by White Mineral Oil and NaOH Solution	The scale is 0-3; 0 = no change; 1 = slight change; 2 = moderate change; 3 = severe change
ASTM F1515	Resistance to Light	ΔE ≤ 8	Test result after 400 hours exposure
ASTM E492-09 (2016) - ASTM E989-06 (2012)	Impact Insulation Class	IIC 75	Paired with TORLYS XV Underlay. Copy of test report available upon request.
ASTM E90-09 (2016) / ASTM E413 - 16	Sound Transmission Coefficient	STC 62	

* Note: "Obsolete, misleading test withdrawn by ASTM in 2014. Not valid for assessing pedestrian safety." <http://www.astm.org/Standards/C1028.htm>

Warranties

20-Year Homeowner Limited Warranty for Wear, Stain, and Water; and a Lifetime Structural and Joint Integrity/No Gapping Warranty.

5-Year Limited Commercial, Wear, Structural and Joint Integrity/No Gapping Warranty.

Flood Warranty: RigidWood™ Vista is covered by an exclusive Flood warranty. Fully waterproof when installed with a perimeter seal. Visit torlys.com for full warranty and installation information.

